

# BIG DOG


## MOVERS AND SCRAPERS



### Load-Transport-Spread with One Trip


Model S-11 (11 yard) Forced Ejection (shown)

The S-6.5 and S-8 offer independent hydraulic control of cutting and spreading and forced ejection. The push gate is operated with a single cylinder, stabilized by guides to prevent mis-alignment. Load, transport, spread and level with hydraulic controlled pushout—with a good view of machine operations by the operator. The 11 yd offers the same features, plus the benefit of a larger payload for farm and industrial operations, including extra HD spindles, hubs and wheels matched with a hefty undercarriage and frame.

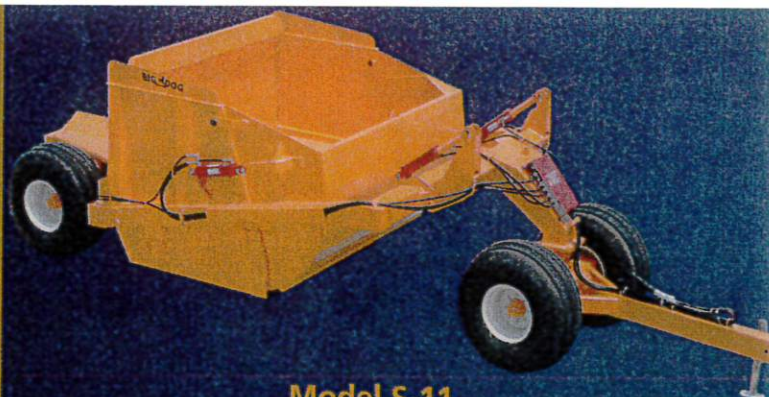

### Model S-11

Heaped Cap. 11 yd. Cut Width 7½' Overall Width 8½'

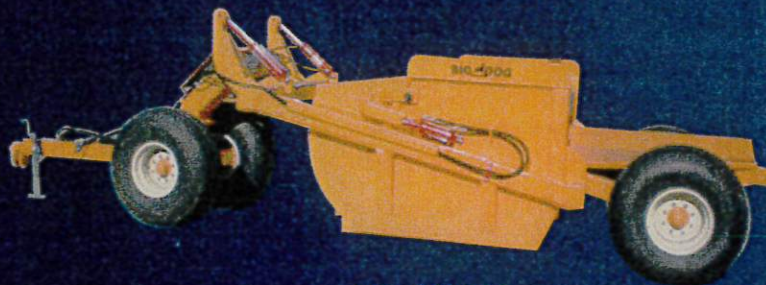

### Model S-8

Heaped Cap. 8 yd. Cut Width 7½' Overall Width 8½'



### Model BH

Available in 10' or 12' Widths

If your plans include feedlots, landscaping, terraces, waterways and driveways the BH Series is for you. BH Series have 24" high x ¾" thick end plates, a hitch designed to accommodate tilt, and a dumping height up to 18". Units tilt right or left by using an 8" cylinder extended or retracted.



### Model S-6.5


Heaped Cap. 6.5 yd. Cut Width 7' Overall Width 8'



### Model BH-100 Feedlot/Industrial Series

Available in 10' or 12' Widths

BH-100 Heavy Duty features include all standard specifications of the BH model plus 41" x ½" end plates, bolt-on spindles, 11L x 15 8-ply tires, hitch jack, up to 24" dumping height with more beef to stand up to the industrial needs of larger operations.


 **CENTRAL CITY**  
**SCALE**  
INCORPORATED  
Scraper Division




Stabilized by guides to prevent mis-alignment.




Hydraulic hose guides.

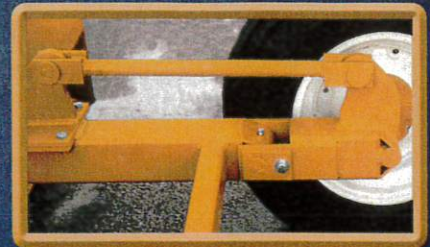


Tilt right or left with 8" cylinder (BH units).

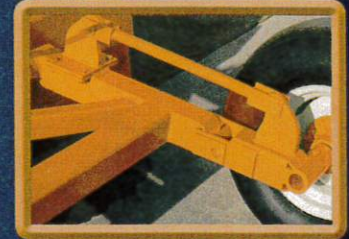

Tilt shown available on both the BH-100 and BH-120 with replaceable stabilizing bar.

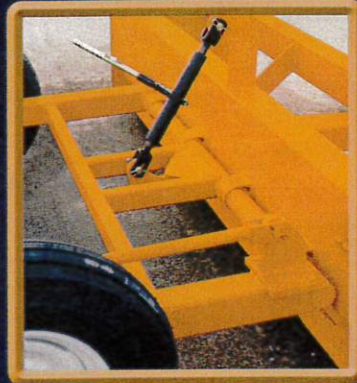

A back view of the BH-12.

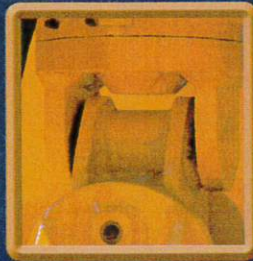

Replaceable gooseneck to axle swivel and pin assembly.



Heavy duty yoke frame.

## BIG DOG Mover and Scraper Specifications

Model	S-6.5	S-8	S-11	BH-100	BH-120	BH
Heaped Capacity	6.5 yd.	8 yd.	11 yd.	4 yd.	5 yd.	BH-10 (10') 1.8 yd.
Width of Cut	7'	7½'	7½'	10'	12'	10', 12'
Overall Width	8'	8½'	8½'	10' 1"	12' 1"	10' 1", 12' 1"
3 pc. Blade w/Frost Blade	Replaceable	Replaceable	Replaceable	Replaceable & Reversible*	Replaceable & Reversible*	Replaceable & Reversible*
Tractor Hyd. Requirements	2 Spool	2 Spool	2 Spool	2 Spool**	2 Spool**	2 Spool**
Power Requirements —Wheel Tractor	100-150HP	125-175HP	160-240HP	75-125HP	100-150HP	NA
Bolt-On Spindles	8 Bolt Wheels W/HD Hubs & Bearings	8 Bolt Wheels	8 Bolt Wheels	6 Bolt Wheels	6 Bolt Wheels	5 Bolt Wheels with welded spindle
Tires	12.5 x 16	16.5 x 16.1	16.5 x 16.1 14 Ply	11L x 15	11L x 15	760 x 15
Weight (approx.)	6000 lbs.	7000 lbs.	8000 lbs.	NA	NA	NA
Optional Equipment	NA	NA	NA	Cylinders & Hoses 3" Bore x 8" Stroke recommended	Cylinders & Hoses 3" Bore x 8" Stroke recommended	Cylinders & Hoses 3" Bore x 8" Stroke recommended

\* BH and BH-100 use 6", 1-piece center punch blade that can be reversed.

\*\* Lift and tilt each require hydraulic cylinder, 3" x 8" recommended.

Note: units can be operated with one 8" cylinder on lift and replaceable stabilizing bar in lieu of cylinder. Manufacturer reserves the right to make changes to the specifications without notice.

*Distributed by:*



2403 26th Ave., P.O. Box 197 • Central City, NE 68826  
308.946.3591 or 308.946.2380 • Fax 308.946.2972  
email: ccscale@hamilton.net